

## EFFECT OF IMPURITIES IN THE RE-CYCLED CO<sub>2</sub> STREAM ON A SUPERCRITICAL CO<sub>2</sub> COMBUSTOR

**K. R. V. Manikantachari\***

Postdoc Scholar  
Center for Advanced Turbomachinery and Energy  
Research (CATER), University of Central Florida,  
Orlando, FL, USA  
[raghu@ucf.edu](mailto:raghu@ucf.edu)

**Scott Martin**

Research Scientist  
Eagle Flight Research Center, Embry-Riddle  
Aeronautical University, Daytona Beach, FL, USA  
[martis38@erau.edu](mailto:martis38@erau.edu)

**Subith Vasu**

Associate Professor  
Center for Advanced Turbomachinery and  
Energy Research (CATER), University of  
Central Florida, Orlando, FL, USA  
[subith@ucf.edu](mailto:subith@ucf.edu)



Dr. K.R.V Manikantachari (Raghu) received his Master's in Mechanical Engineering from IIT Madras (2011) and earned his Ph.D. from University of Central Florida (2019) in Mechanical Engineering. Before joining his Ph.D., he spent four years with Renault-Nissan automotive company as a combustion engineer. Now, after his Ph.D., he is continuing his career as a Postdoc scholar at University of Central Florida. His research interests include combustion theory, chemical kinetics, fundamental and advanced combustion modeling for propulsion and power. He has authored and co-authored many publications on combustion kinetics, supercritical combustion modeling.



Dr. Scott Martin spent eight years with Siemens Energy in Orlando, FL as a combustion engineer focused on fuels and advanced combustor design. During this time he was assigned to work on the DOE funded H<sub>2</sub> Gas Turbine project tasked to develop premixed combustors for synthetic and hydrogen fuels at up to 30 bar pressures. Scaled combustors were designed and tested at university laboratories and full-scale combustors were tested at national labs in Canada, Germany, and Italy. This work led to 3 US patents with 4 more pending. An integral part of this work was developing numerical models, 1-D and 3-D, plus chemical kinetic mechanisms. Here the premixed CMC turbulent combustion model that he developed in graduate school was adapted to the open source CFD code OpenFOAM. During this time, Dr. Martin worked with researchers at Georgia Tech, UCF, University of Texas, University of Iowa and Purdue, and published a number of papers related to this field. Dr. Martin received his initial leadership and management training in the US Marine Corps, followed by progressively more responsible positions in industry and now in academia where he is the leader of the propulsion group at the Eagle Flight Research Center at ERAU. During periods at the Boeing Company and Ford Motor Company he led teams that were tasked to solve specific problems. At Siemens he was the head of the combustion kinetics groups and the liaison between the combustion group and academia



Dr. Subith S. Vasu received his B. Tech in Aerospace Engineering from IIT Madras (2004) and earned his Ph.D. from Stanford University (2010) in Mechanical Engineering. He spent a year as a post-doc at the Combustion Research Facility (Sandia National Labs) before joining UCF in 2012 as an assistant professor in the Mechanical and Aerospace department. Dr. Vasu's research interests are in sCO<sub>2</sub> combustion chemistry and modeling for direct-fired systems, experimental rigs for sCO<sub>2</sub> property evaluation, laser diagnostics and sensors, shock wave physics, and laser

spectroscopy. He is the author of more than 150 journal and conference articles including one article in the prestigious *Science* magazine. He is also a reviewer for numerous journals, session chair for conferences, and has reviewed proposals for federal agencies. He has won several national and international awards given to early career academic researchers. He is the recipient of 2017 American Society of Mechanical Engineers (ASME) and International Gas Turbine Institute's Dilip Ballal Early Career Award and the Society of Automotive Engineers (SAE)'s 2018 Ralph R Teetor Educational Award. Currently, he has ongoing research projects from FAA, NASA, DTRA, DOE, DoD, FSGC, ACSPRF, and several industries.

## ABSTRACT

This work provides a short review of sCO<sub>2</sub> combustor design considerations and provides more insights into the effect of impurities in the re-cycled CO<sub>2</sub> stream of the sCO<sub>2</sub> combustor. Two main impurities studied here are, O<sub>2</sub> and H<sub>2</sub>O. Incomplete combustion and inefficiency of water separation unit in the Allam cycle [1] may increase the probability of these impurities to re-enter into the combustion chamber.


In this work, Large-Eddy Simulations (LES) are also performed on a sCO<sub>2</sub> combustor by using Converge® CFD tool. Here, realgas corrections are accounted for with the Soave-Redlich-Kwong equation-of-state (SRK EOS) and kinetics are accounted for by an Aramco 2.0 derived 23-species mechanism. The results show that, when the O<sub>2</sub> and H<sub>2</sub>O impurities are up to 5000 ppm, the near burner radial reaction zone increases in width. Further, the CO production/oxidation in the primary zone is significantly influenced by these impurities. Also, the CO distribution is observed to be higher at the core of the swirl in the primary zone due to impurities. Under the studied conditions, the H<sub>2</sub>O impurity is delaying the CO oxidation. Hence, higher CO levels can be expected at the end of combustor if H<sub>2</sub>O impurities are higher in the re-cycled CO<sub>2</sub> stream. However, O<sub>2</sub> impurities support the complete oxidation of CO hence a better thermal efficiency can be achieved.

## INTRODUCTION

The supercritical CO<sub>2</sub> (sCO<sub>2</sub>) power cycle is an emerging technology which has the potential to address both environmental concerns and energy demands. The well-known features of this power cycle are: 1) the high expected cycle efficiency compared to corresponding HE, AR and steam cycles, 2) compactness of the overall power plant, 3) complete capture of CO<sub>2</sub> and 4) the wide applicability over all power producing applications. This is a closed cycle and uses sCO<sub>2</sub> as the working fluid, therefore, CO<sub>2</sub> produced by the direct-fired, oxy-methane combustion can be recirculated within the same cycle loop and the excess supercritical CO<sub>2</sub> from the cycle can be used for other commercial purposes [2]. However, current state-of-art peak operating pressures for sCO<sub>2</sub> combustion is approximately 300 atm [2] and the level of CO<sub>2</sub> dilution in the combustor is more than 95% percent by mass. Here, the presence of sCO<sub>2</sub> at 300 atm shows a different dilution effect on combustion phenomenon than N<sub>2</sub> (air-diluted combustion) due to significant differences in their thermo-chemical properties. Therefore, the mixing and reaction phenomenon, ignition and blowout phenomenon are expected to be considerably different in sCO<sub>2</sub> combustion than an air-diluted combustor. At these extreme pressure and dilution conditions, experiments and testing are expensive, time consuming, and dangerous. Also, during the initial development of a combustor, even finalizing the design based on 3-D simulations is a tedious task because a wide range of operating conditions or strategies needs to be tested. Therefore, initial domain of operating conditions or strategies can be minimized by accurate 0-D and 1-D simulations. Further, the detailed 3-D simulations and experiments can be carried based on the directions of the 0-D and 1-D analysis. As per the available literature, guidelines for designing and modeling sCO<sub>2</sub> combustors are minimal [3-12] and still there is a need for testing a large number of combinations of initial operating conditions and design strategies before successfully constructing an efficient sCO<sub>2</sub> combustor.

The perfectly-stirred reactor (PSR) modeling was extensively used in the 1950s to guide the development of gas turbine combustors and ramjets [13-15]. Also, complete gas turbine combustor performance analysis was carried out by coupling plug-flow reactor (PFR) and PSR models [16-18]. This method is used in [19, 20] to provide crucial design considerations for sCO<sub>2</sub> combustor development. In these works, only a single PSR and PFR combination is used as shown in Fig.1, because the main objective of those works is not to simulate a particular combustor but to reduce the initial domain of operating strategies. Therefore, the results shown in those papers are qualitative in nature. These works use the real gas version of CHEMKIN, i.e., CHEMKIN-RG [21] and coupled with CHEMKIN PSR and PFR codes [22, 23].


Also, some important requirements for sCO<sub>2</sub> combustors are as follows: 1) lower residence time/smaller volume, 2) protection from impurities developed in the closed loop of the cycle, and 3) complete burning of fuel within the combustion chamber.

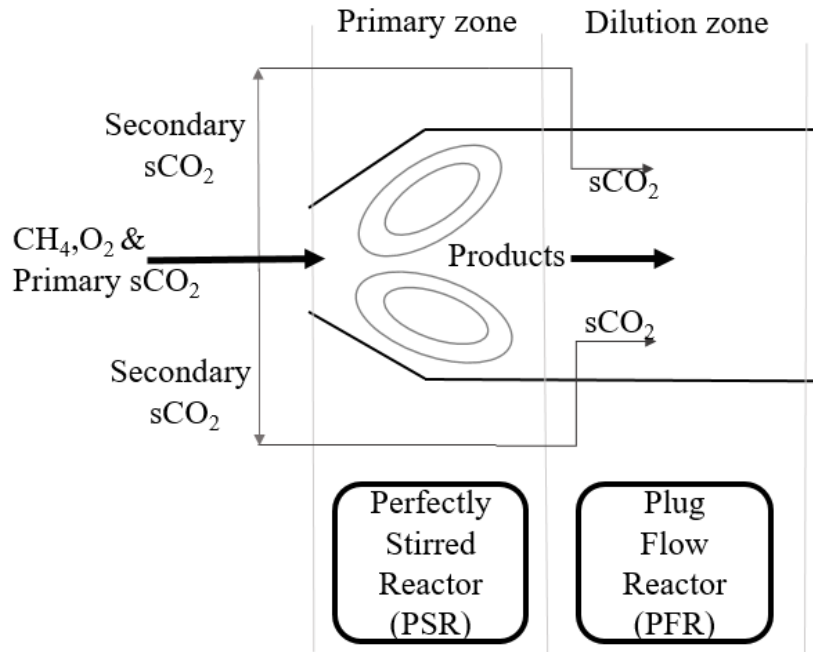

**Figure 1:** Modeling of sCO<sub>2</sub> combustor by PSR and PFR [19, 20]

The first requirement as mentioned earlier is essential from the design point of view because, the previous studies show that the sCO<sub>2</sub> turbine is fifty-times smaller than an equal power steam turbine, hence the combustor volume should be scaled down to an optimal level for proper alignment with the turbine. A combustion chamber primary zone volume can be reduced by having only pure oxy-methane combustion in the primary zone and by purging recycled CO<sub>2</sub> into the dilution zone. However, the study [19] shows that, operating the combustor without any CO<sub>2</sub> dilution in the primary zone is very dangerous at 300 bar pressure. On the other extreme, supplying 100% of re-cycled CO<sub>2</sub> into the primary zone is also not feasible because the amount of residence time required to oxidize 99.99% of the fuel is very large. Hence, the size requirement of the combustor will be large. An optimum CO<sub>2</sub> split between primary and dilution zones in sCO<sub>2</sub> combustors is 50-50% for reasonable size of the combustor and complete oxidation of CO.

The earlier works [19, 20] qualitatively show the possibility of high CO and O<sub>2</sub> traces for a smaller residence time combustor and recommends a novel idea of incorporating a pre-reaction chamber ahead of the combustion chamber in the sCO<sub>2</sub> Allam cycle as shown in the Fig. 2. This pre-reaction chamber is shown to reduce the sCO<sub>2</sub> combustion chamber required residence time for complete burning of fuel, however it should be noted that, a detailed cycle analysis is further needed for understanding the feasibility of using a pre-reaction chamber in Allam cycle.

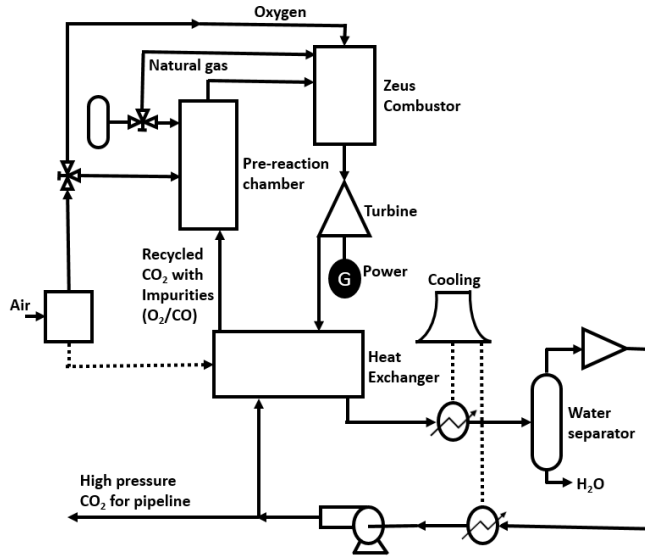

**Figure 2:** Allam cycle with pre-reaction chamber [20]

Also, another challenge in the  $s\text{CO}_2$  combustor design is that the traces of  $\text{CO}$ ,  $\text{O}_2$  and  $\text{H}_2\text{O}$  may buildup over a period of closed loop operation and it may influence the combustion performance. The work of [24] showed that, impurities could significantly influence  $s\text{CO}_2$  cycle performance. Hence, in this current work the effect of  $\text{O}_2$  and  $\text{H}_2\text{O}$  in re-cycled  $\text{CO}_2$  stream of Allam cycle on combustor performance is studied by using Large-eddy-simulations (LES). The LES simulations are performed by a commercial CFD tool called Converge®

## MODELING

A recent  $s\text{CO}_2$  combustor model [25] of Southwest Research Institute (SwRI), which is under development is used in these simulations as shown Fig.3 with a slight change in the dilution zone geometry. The inlet flow conditions to the combustor are reproduced from [26] and shown in Fig. 4. A detailed description of this combustor can be found in the work of [26].

Here, the oxidizer jet consists of  $\text{O}_2$  and  $\text{CO}_2$  and it mixes with pure a  $\text{CH}_4$  jet inside a swirl injector in a crossflow configuration. The swirl angle of the injector is  $40^\circ$  and the reacting jet which is coming out of the swirl injector mixes with fifty-percent of purging  $\text{CO}_2$  in the primary zone. The remaining 50% of the  $\text{CO}_2$  is distributed across the inlets of the dilution zone. Here, it should be noted that the design of the dilution zone shown in this work is different from the work of [26].

The detailed simulation parameters are listed in Table 1. Here, Large-eddy simulations are performed with the Viscous-One equation model which is developed by [27]. The Converge® CFD uses adaptive mesh refining (AMR) strategy hence the base cell size and AMR are used in order to have approximately six million cells in the combustor. Also, Soave-Redlich-Kwong equation of state is used in these simulations. Here, an Aramco 2.0 derived 23-species mechanism [28] is used and all the species transport equations are solved by using SAGE detailed chemistry in which all species conservation equations are solved. Further, the viscosity and thermal conductivity are modeled by assuming that the working fluid is pure  $\text{CO}_2$  and these transport property profiles are obtained from NIST-REFPROP. An important point to be noted here is that, the reactor residence time for this combustor is large i.e., approximately thirty milliseconds, hence the simulation is continued until six flow-through times (180 milliseconds). A statistically stationary solution is observed after 90 milliseconds, but the data presented in this work are obtained at a sufficiently large simulation time (after 140 milliseconds) for better confidence.

Three cases as shown in Table 2 are simulated to investigate the effect of impurity in the re-cycled  $s\text{CO}_2$  stream on the combustor performance. It must be noted that, the influence of  $\text{CO}$  impurity is not studied in this work because as a design requirement the  $\text{CO}$  must be burnt within the combustion chamber, hence no  $\text{CO}$  is considered in the re-cycled  $\text{CO}_2$  stream. It should also be noted that the total flow rate is kept constant in each case.

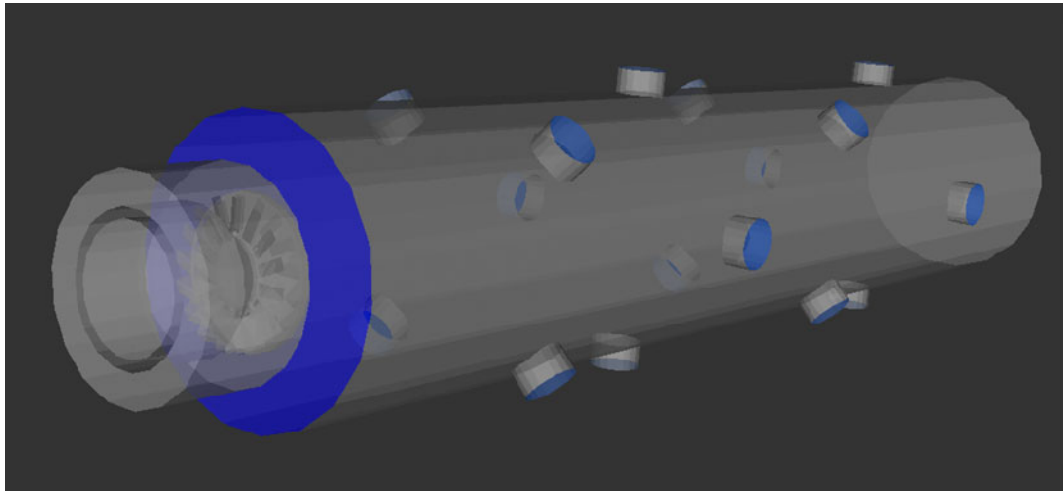


Figure 3: A three-dimensional view of recent SwRI sCO<sub>2</sub> combustor [25, 26]. (blue colored boundaries indicate the inlets of re-cycled CO<sub>2</sub> stream for dilution)

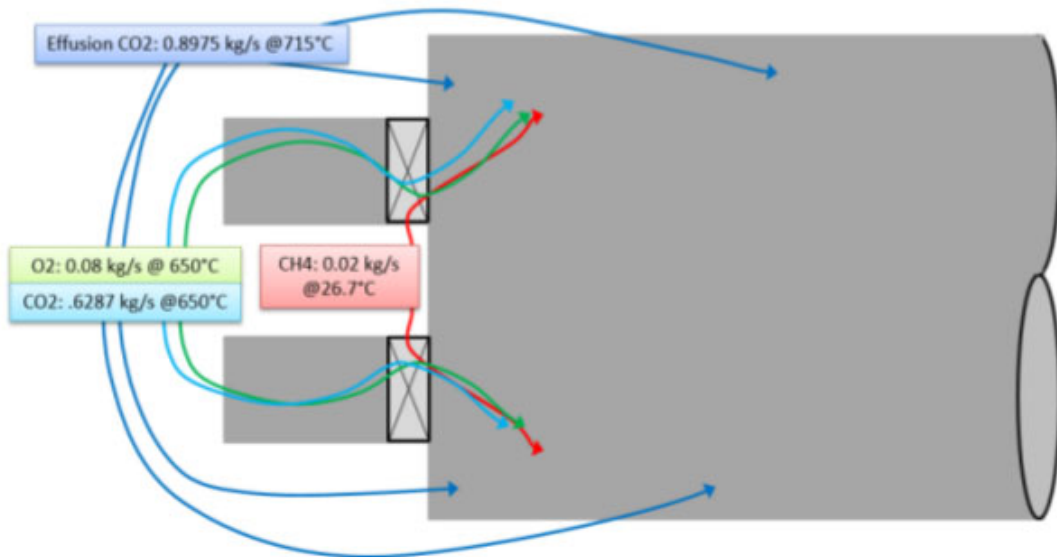


Figure 4: Inlet flow conditions to the combustion chamber; reproduced from [26]

Table 1: Simulation parameters used in this study

S . No	Modeling	Parameter /model chosen
1)	Turbulence modeling	Large-eddy simulation → Viscous One Equation. This model uses sub-grid kinetic energy in modeling the turbulent viscosity [27].
2)	Wall heat transfer modeling	O'Rourke and Amsden [29]
3)	Combustion modeling	SAGE detailed chemistry (all species transport equations are solved).
4)	Number of cells	Approximately six million cells (Adaptive mesh refinement is used)
5)	Equation of state	Soave-Redlich-Kwong equation of state based on [6]
6)	Viscosity and Thermal conductivity	Pure CO <sub>2</sub> properties between 800 -1600 K from REFPROP [30] are used.
7)	Chemical kinetic mechanism	A 23-species mechanism derived from Aramco 2.0 [28]
8)	Simulation time	6 follow-through times

## RESULTS AND DISCUSSION

As discussed in the introduction purifying the exhaust products of the combustion to obtain 100% pure re-cycled CO<sub>2</sub> stream is expensive. In fact, the separation of the final traces of impurities would be costlier. Therefore, the operation cost of exhaust separation can be reduced if the combustor is designed to perform under some optimum levels of impurities. The major impurities in the exhaust stream could be CO, O<sub>2</sub> and H<sub>2</sub>O. In the Allam cycle, H<sub>2</sub>O can be separated by condensing the exhaust products, but the separation of CO and O<sub>2</sub> from the products is difficult. Therefore, it is recommended to design the combustion chamber in order to have either CO or O<sub>2</sub> [20] at the exit. As observed from the work [19], for smaller reactor residence time combustors, most of the fuel can remain in the form of unburnt CO. Also, CO does not react in the dilution zone due to the unavailability of O<sub>2</sub> (If re-cycled CO<sub>2</sub> is pure). Therefore, an optimal lean operation is necessary for sCO<sub>2</sub> the combustor to burn all of the CO. Now, in such cases of lean operation the major exhaust products would be CO<sub>2</sub>, O<sub>2</sub> and H<sub>2</sub>O. Therefore, three cases as shown in Table 2 are considered in the current work to understand the influence of impurities. Also, as mentioned in the modeling section, the total flow rate of the re-cycled stream is kept constant in all three cases. Here, Case-1 contains pure re-cycled CO<sub>2</sub> without any impurities, Case-2 has 5000 ppm of O<sub>2</sub> and Case-3 has 5000 ppm of H<sub>2</sub>O in the re-cycled CO<sub>2</sub> stream.

Table 3 shows a comparison of time averaged temperature profiles from the LES simulation for the three cases considered. Here, there is a difference in the near burner temperature distribution in the radial direction. Radial width of temperature is smaller for Case-1 compared to Cases-2 and 3. This change is basically due to changes in the reaction zone. In Cases-2 and 3, the O<sub>2</sub> and H<sub>2</sub>O present in CO<sub>2</sub> stream is reacting with the combustion products and increases in the reaction zone are observed.

Further, Table 4 shows the time averaged mass fraction of CO for the three cases considered. Here, it is evident that the CO in the primary zone is higher in Cases 2 and 3 compared to Case-1. Also, a high CO concentration region can be observed symmetrical to the axis in all the cases. These high CO concentration zones are formed just after the first set of radial dilution holes as seen in Fig. 5. Here, the low temperature CO<sub>2</sub> which is coming from the dilution holes is quenching the reaction zone products temperature and


delaying the CO oxidation. It should be noted that, CO concentration just after first set of dilution holes is higher in Case-3 of Table 4 and lower for Case-2. It is because H<sub>2</sub>O present in the CO<sub>2</sub> is retarding the CO oxidation in Case-3 and accelerating CO oxidation in Case-2.

**Table 2:** Various cases considered in this study

Cases investigated in this study	What does the case represent?
Case-1	The recycled stream consists of pure CO <sub>2</sub> .
Case-2	The recycled CO <sub>2</sub> stream consists of O <sub>2</sub> impurity by 5000 ppm
Case-3	The recycled CO <sub>2</sub> stream consists of H <sub>2</sub> O impurity by 5000 ppm

Table 5 shows the spatial mean values of CO, O<sub>2</sub>, CH<sub>4</sub> and temperature at the exit of the combustor. Here, the inlet CH<sub>4</sub> flow rate is the same for all three cases and we can see that all three cases show that the CH<sub>4</sub> is fully oxidized before the exit. However, the CO levels are significantly different. The CO is highest for Case-3 and lowest for Case-2. Which signifies the need of better CO oxidation strategies when we cannot separate H<sub>2</sub>O in the water separation unit of the Allam cycle. Also, it is interesting to note that the exit temperature of Case-3 is increased slightly even though there is a plenty of CO remains at the exit. Further Case-2 shows that almost 2000 ppm of O<sub>2</sub> is left at the combustor exit when there is O<sub>2</sub> impurity in the re-cycled CO<sub>2</sub> stream and this case has the least CO and highest temperature. Therefore, these show that the lean operation is the best strategy to achieve a better thermal efficiency. As per current state-of-art, operating air-separation units is costlier in the Allam cycle and hence the lean operation is less acceptable. Therefore, further cycle analysis is required in this direction.

**Table 3:** The comparison of combustor mid-section temperature contours

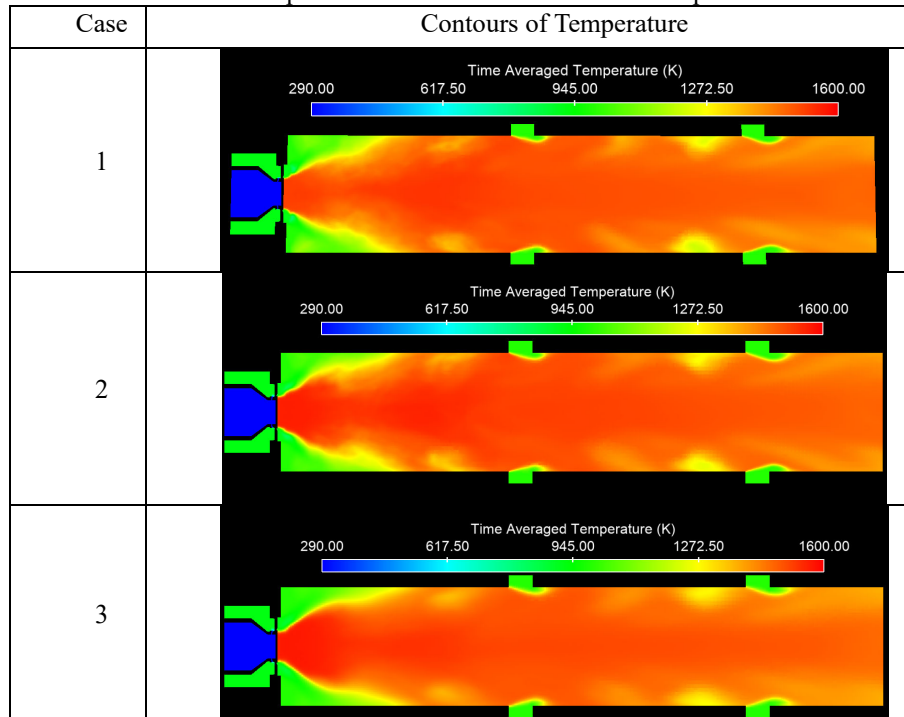

**Table 4:** The comparison of combustor mid-section CO contours  
Contours of CO Mass Fraction


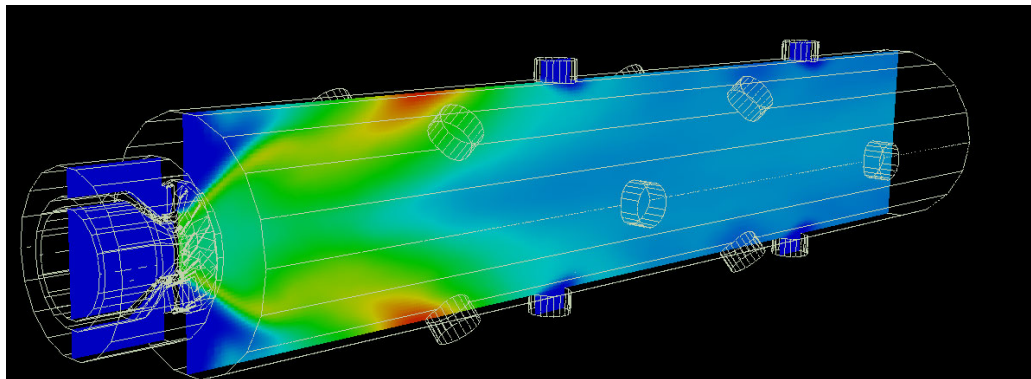


Figure 5: A 3D view of CO mass fraction distribution on the cross-section plane.

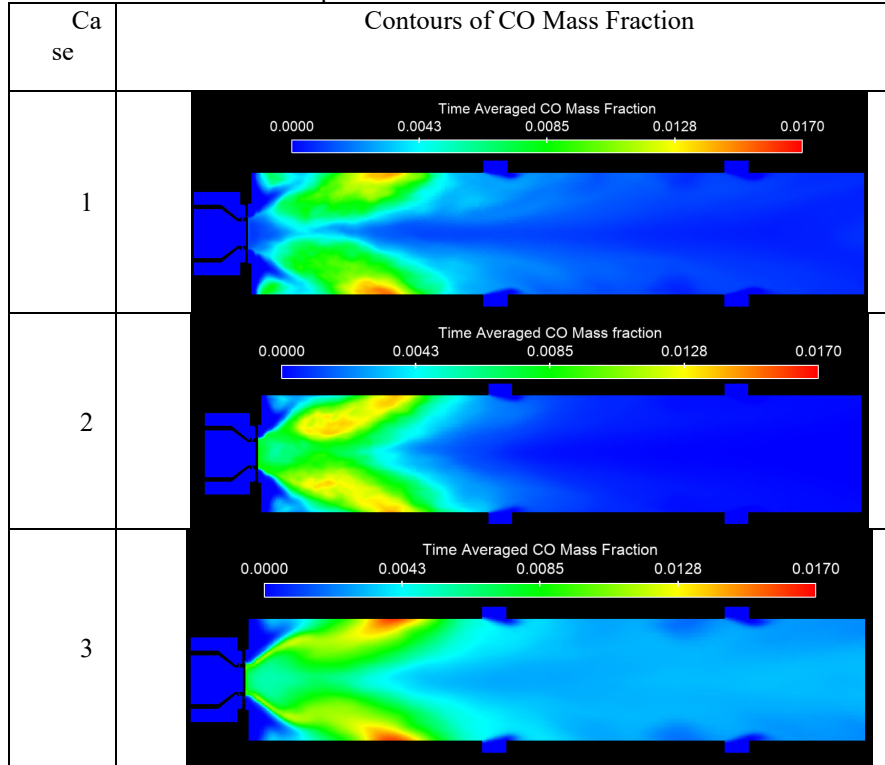

**Table 5:** The spatial, time averaged mean values CO, O<sub>2</sub>, CH<sub>4</sub> and temperature at the exit plane of the combustor

	CO (ppm)	O <sub>2</sub> (ppm)	CH <sub>4</sub> (ppm)	Temperature (K)
Case1	1194	351	0	1402.3
Case2	185	2000	0	1415.9
Case3	1782	248	0	1408.4

## CONCLUSIONS

In the current work, recent zero and one-dimensional design investigations for sCO<sub>2</sub> combustion are reviewed and large-eddy simulations are performed using the Converge® CFD tool to investigate the effect of impurities such as O<sub>2</sub> and H<sub>2</sub>O in the re-cycled CO<sub>2</sub> stream on the combustor performance. The conclusions are as follows:

- 1) Presence of H<sub>2</sub>O in the re-cycled CO<sub>2</sub> stream retards CO oxidation, hence higher CO concentrations can be expected at the exit of the sCO<sub>2</sub> combustor.
- 2) Presence of O<sub>2</sub> in the re-cycled CO<sub>2</sub> stream improves CO oxidation, hence CO can be burnt completely within the combustion chamber.
- 3) O<sub>2</sub> impurities also improve the thermal efficiency in the sCO<sub>2</sub> combustor.

## ACKNOWLEDGEMENTS

This material is based upon work supported by the Department of Energy under Award Numbers DE-FE0025260 and DE-FE0024041. Also, we thank Dr. Jacob Delimont (SwRI) for sharing the geometry of the sCO<sub>2</sub> burner used in this study.

Disclaimer: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof

## REFERENCES

- [1] Allam, R. J., Palmer, M. R., Brown Jr, G. W., Fetvedt, J., Freed, D., Nomoto, H., Itoh, M., Okita, N., and Jones Jr, C., 2013, "High efficiency and low cost of electricity generation from fossil fuels while eliminating atmospheric emissions, including carbon dioxide," *Energy Procedia*, 37, pp. 1135-1149.
- [2] Allam, R., Fetvedt, J., Forrest, B., and Freed, D., "The oxy-fuel, supercritical CO<sub>2</sub> Allam Cycle: New cycle developments to produce even lower-cost electricity from fossil fuels without atmospheric emissions," *Proc. ASME turbo expo 2014: turbine technical conference and exposition*, American Society of Mechanical Engineers, pp. V03BT36A016-V003BT036A016.
- [3] Chong, S. T., Tang, Y., Hassanaly, M., and Raman, V., "Turbulent Mixing and Combustion of Supercritical Jets," *Proc. 55th AIAA Aerospace Sciences Meeting*, p. 0141.
- [4] Abdul-Sater, H., Lenertz, J., Bonilha, C., Lu, X., and Fetvedt, J., "A CFD Simulation of Coal Syngas Oxy-Combustion in a High-Pressure Supercritical CO<sub>2</sub> Environment," *Proc. ASME Turbo Expo 2017: Turbomachinery Technical Conference and Exposition*, American Society of Mechanical Engineers, pp. V04AT04A051-V004AT004A051.
- [5] Delimont, J., McClung, A., and Portnoff, M., "Direct Fired Oxy-Fuel Combustor for sCO<sub>2</sub> Power Cycles: 1MW Scale Design and Preliminary Bench Top Testing," *Proc. ASME Turbo Expo 2017: Turbomachinery Technical Conference and Exposition*, American Society of Mechanical Engineers, pp. V009T038A027-V009T038A027.
- [6] Manikantachari, K. R. V., Martin, S., Bobren-Diaz, J. O., and Vasu, S., 2017, "Thermal and Transport Properties for the Simulation of Direct-Fired sCO<sub>2</sub> Combustor," *Journal of Engineering for Gas Turbines and Power*, 139(12), pp. 121505-121505-121514.

- [7] Kancherla, R. V. M., Martin, S. M., Bobren-Diaz, J., and Vasu, S., "A Counter-flow Diffusion Flame study for the Supercritical CO<sub>2</sub> Combustion," Proc. AIAA Scitech 2019 Forum, p. 0673.
- [8] Strakey, P. A., 2019, "Oxy-Combustion Modeling for Direct-Fired Supercritical CO<sub>2</sub> Power Cycles," Journal of Energy Resources Technology, 141(7), pp. 070706-070706-070708.
- [9] Kancherla, R. V. M., Martin, S. M., Bobren, J. O., and Vasu, S., "The Influence of Elevated Pressures on the Methane Combustion in N<sub>2</sub> and Co<sub>2</sub> Dilutions," Proc. 53rd AIAA/SAE/ASME Joint Propulsion Conference.
- [10] Manikantachari, K. R. V., Martin, S., Rahman, R. K., Velez, C., and Vasu, S., 2019, "A General Study of Counterflow Diffusion Flames for Supercritical CO<sub>2</sub> Combustion," Journal of Engineering for Gas Turbines and Power, 141(12).
- [11] Manikantachari, K. R. V., Martin, S., Rahman, R. K., Velez, C., and Vasu, S., "A General Study of Counterflow Diffusion Flames for Supercritical CO<sub>2</sub> Mixtures," Proc. ASME Turbo Expo 2019: Turbomachinery Technical Conference and Exposition V04AT04A021.
- [12] Manikantachari, K., Vesely, L., Martin, S., Bobren-Diaz, J. O., and Vasu, S., 2018, "Reduced Chemical Kinetic Mechanisms for Oxy/Methane Supercritical CO<sub>2</sub> Combustor Simulations," Journal of Energy Resources Technology, 140(9), p. 092202.
- [13] Turns, S. R., 1996, An introduction to combustion, McGraw-hill New York.
- [14] Swithenbank, J., Poll, I., Vincent, M., and Wright, D., "Combustion design fundamentals," Proc. Fourteenth Symposium (International) on Combustion, Elsevier, pp. 627-638.
- [15] Beer, J., and Lee, K., "The effect of the residence time distribution on the performance and efficiency of combustors," Proc. Symposium (International) on Combustion, Elsevier, pp. 1187-1202.
- [16] Andreini, A., and Facchini, B., "Gas turbines design and off-design performance analysis with emissions evaluation," Proc. ASME Turbo Expo 2002: Power for Land, Sea, and Air, American Society of Mechanical Engineers, pp. 271-281.
- [17] Syed, M. S., Punuru, J. R., Dooley, K. M., and Knopf, F. C., 2012, "A readily accessible platform for detailed combustion emissions calculations," International Journal of Mechanical Engineering Education, 40(4), pp. 289-304.
- [18] Bongartz, D., Shanbhogue, S. J., and Ghoniem, A. F., 2015, "Formation and Control of Sulfur Oxides in Sour Gas Oxy-Combustion: Prediction Using a Reactor Network Model," Energy & Fuels, 29(11), pp. 7670-7680.
- [19] Manikantachari, K., Martin, S., Vesely, L., Bobren-Diaz, J. O., Vasu, S., and Kapat, J., "A Strategy of Reactant Mixing in Methane Direct-Fired sCO<sub>2</sub> Combustors," Proc. ASME Turbo Expo 2018: Turbomachinery Technical Conference and Exposition, American Society of Mechanical Engineers, pp. V009T038A008-V009T038A008.
- [20] Manikantachari, K. R. V., Martin, S., Vesely, L., Bobren-Diaz, J. O., Vasu, S., and Kapat, J., 2018, "A Strategy of Mixture Preparation for Methane Direct-Fired sCO<sub>2</sub> Combustors," (51180), p. V009T038A009.
- [21] Schmitt, R., Butler, P., and French, N. B., 1993, "CHEMKIN Real Gas," UIME PBB, pp. 93-006.
- [22] Glarborg, P., Kee, R., Grcar, J., and Miller, J., 1986, "PSR: A FORTRAN program for modeling well-stirred reactors," Sandia Report SAND86-8209.
- [23] Larson, R. S., 1996, "PLUG: A Fortran program for the analysis of plug flow reactors with gas-phase and surface chemistry," Sandia Labs., Livermore, CA (United States).
- [24] Vesely, L., Manikantachari, K. R. V., Vasu, S., Kapat, J., Dostal, V., and Martin, S., 2018, "Effect of Impurities on Compressor and Cooler in Supercritical CO<sub>2</sub> Cycles," Journal of Energy Resources Technology, 141(1), pp. 012003-012003-012008.
- [25] Andrews, J. D. N., 2018, "Computational Modeling of a Direct Fired Oxy-Fuel Combustor for sCO<sub>2</sub> Power Cycles," sCO<sub>2</sub> symposium Pittsburgh.
- [26] Delimont, J., Andrews, N., and Chordia, L., 2018, "Computational Modeling of a 1MW Scale Combustor for a Direct Fired sCO<sub>2</sub> Power Cycle," (51180), p. V009T038A025.
- [27] Menon, S., Yeung, P.-K., and Kim, W.-W., 1996, "Effect of subgrid models on the computed interscale energy transfer in isotropic turbulence," Computers & fluids, 25(2), pp. 165-180.
- [28] Manikantachari, K. R. V., Ladislav, V., Martin, S., Bobren-Diaz, J., and Vasu, S., 2018, "Reduced Chemical Kinetic Mechanisms for Oxy/Methane Supercritical CO<sub>2</sub> Combustor Simulations," Journal of Energy Resources Technology.

[29] Amsden, A. A., and Findley, M., 1997, "KIVA-3V: A block-structured KIVA program for engines with vertical or canted valves," Lawrence Livermore National Lab.(LLNL), Livermore, CA (United States).

[30] Lemmon, E. W., Huber, M. L., and McLinden, M. O., 2002, "NIST reference fluid thermodynamic and transport properties–REFPROP," NIST standard reference database, 23, p. v7.